

VELUX electric blackout roller blind DML




VELUX electric blackout roller blinds can be remote-controlled and let you enjoy a good night's sleep by delivering the best blackout effect on the market. They connect seamlessly with your VELUX electric roof windows to give you complete control over the natural light in your room. VELUX blinds with white side rails fit perfectly with your white VELUX roof windows.

- O melhor blackout do mercado dá-lhe uma escuridão completa para uma melhor noite de sono ou uma sesta da tarde.
- As cortinas, toldos exteriores e estores VELUX elétricos dão-lhe um conveniente controlo remoto para um conforto extra.
- Operate your blinds any way you want: manually, remotely or automatically.
- Instalar em minutos - basta colocar a cortina com clique nos suportes pré-montados e estes são ligados para controlo remoto.
- A certificação OEKO-TEX® para a norma 100 garante que o produto é feito sem substâncias nocivas.
- Cortina de design elegante com perfis laterais brancos, que encaixam perfeitamente nas janelas de sótão VELUX brancas.
- O desenho de perfil mais fino do mercado deixa entrar mais luz natural.
- Compatível com VELUX ACTIVE com NETATMO - controle os seus produtos a partir de qualquer lugar que deseje via smartphone ou controlo por voz.



Colours and patterns

As cortinas interiores VELUX estão disponíveis numa vasta gama de cores e designs. No entanto, algumas variantes de cortinas só estão disponíveis numa gama limitada de cores. Cada opção de cor e design tem um código único. Adicione o código que escolher ao tipo de cortina relevante ao encomendar os seus produtos.

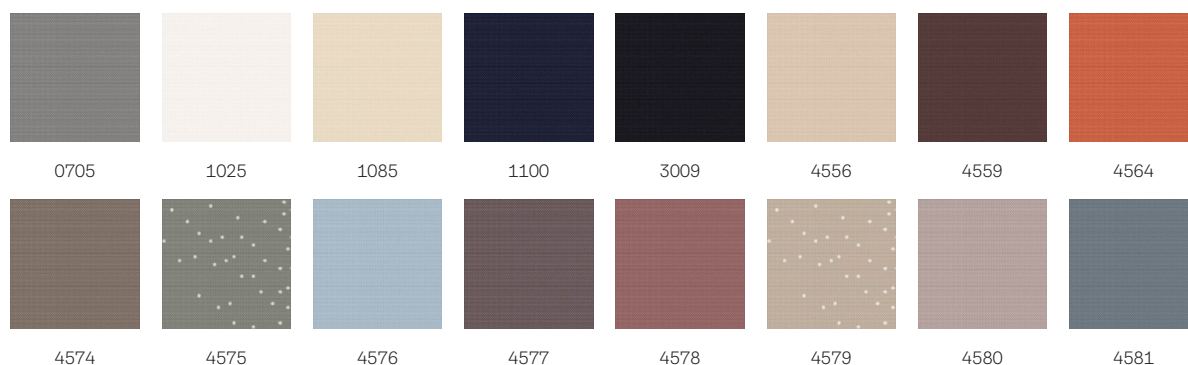

Operation guidance

The VELUX electric blackout blind comes with a pre-paired wall switch for remote control and an on-product operation slider for manual operation. The blind can be raised and lowered to any desired position.

Compatibility

Compatibility with VELUX roof windows:

Blackout blind DML can be installed in GGL, VELUX electric GGL, GGU, VELUX electric GGU, and manually operated GPL, GPU, GZL, GLL, GLU, GGLS and GPLS.

As to sizes, please refer to the price list as continuous changes of the product programme are made. The blind can also be made to measure.

Compatibility with other VELUX sunscreening products, VELUX electric and solar products and VELUX ACTIVE products:

The blind cannot be combined with other interior suncreening products. It can be combined with exterior suncreening products and electric window operators. It can also be fitted with insect roller screen ZIL.

Informação suplementar

Nós reservamos o direito de fazer alterações técnicas. Para mais informações sobre os nossos produtos, visite por favor

Technical information

VELUX electric blackout roller blind DML	Connection	When fitting the blind onto VELUX electric roof windows, no wiring is required as it is clicked directly onto the electrical installation brackets in the window. When fitting the blind onto manually operated VELUX roof windows or a VELUX roof window with retrofitted window operator, a separate cable set is required: ZOZ 241 for V22 roof windows, e.g. size code CK-- ZOZ 242 for V22 roof windows, size code PK25 ZOZ 243 for V21 roof windows, e.g. size code C-- ZOZ 244 for V21 roof windows, size code P25
	Installation and use	The blackout blind is easily clicked onto the top brackets pre-fitted in the window, leaving both hands free during the remaining part of the installation. When clicked onto VELUX electric roof windows, no wiring is required as the windows have pre-installed electrical installation brackets. When installing DML in a manually operated VELUX roof window or a VELUX roof window with retrofitted window operator, a separate cable set is required, ZOZ 241 for roof windows with K in size code, e.g. CK-- ZOZ 242 for roof windows size PK25 ZOZ 243 for roof windows with one letter in size code, e.g. C-- ZOZ 244 for V21 roof windows size P25
	Material and colour	Multiple operation at your choice Use the blinds any way you want; manually, remotely or automatically. And control your blinds from anywhere – or across the room using the VELUX App Control. Control bar with motor unit, top fascia and side rails: White lacquered aluminium. Bottom brackets: Plastic, grey. Product is certified in accordance with STANDARD 100 by OEKO-TEX® (1076-184) – textiles tested for certain harmful substances and STeP by OEKO-TEX® (22002567) – STeP stands for Sustainable Textile & Leather Production.
	Power consumption	0.25 A, 24 V d.c. from a VELUX electric roof window or from a VELUX electric control system
Interruptor de parede pré-emparelhado	Installation and use	Está incluído um interruptor de parede de frequência de rádio de um só sentido pré-configurado (KLI 312). Gama de radiofrequências: alcance de 300 m em campo aberto. Dependendo da construção do edifício, o alcance interior é de aproximadamente 30 m.
	Material and colour	Plástico ABS, branco (NCS S 1000-N)
	Power consumption overview	2 x pilhas alcalinas AAA (1,5V) Tempo esperado de vida da bateria: até 1 ano
	Size and weight description	8,2 cm x 8,2 cm x 1,7 cm, 0,125 kg.